

Inventory Control Form

Medium External Fixation System



Patient Information:

SYNTHES (USA)
To Order: (800) 523-0322

SYNTHES (Canada) Ltd.
To Order: (800) 668-1119

Date: _____

Hospital: _____

Surgeon: _____

Procedure: _____

Implants

Self-Drilling Schanz Screws



		DIAMETER	LENGTH
<input type="checkbox"/>	294.769	4.0 mm/2.5 mm	80 mm
<input type="checkbox"/>	294.771	4.0 mm/3.0 mm	80 mm
<input type="checkbox"/>	294.772	4.0 mm/3.0 mm	100 mm
<input type="checkbox"/>	294.773	4.0 mm/3.0 mm	65 mm
<input type="checkbox"/>	294.774	4.0 mm	60 mm
<input type="checkbox"/>	294.775	4.0 mm	80 mm
<input type="checkbox"/>	294.776	4.0 mm	100 mm
<input type="checkbox"/>	294.777	4.0 mm	125 mm
<input type="checkbox"/>	294.778	4.0 mm	150 mm
<input type="checkbox"/>	294.779	4.0 mm	175 mm
<input type="checkbox"/>	294.782	5.0 mm	100 mm
<input type="checkbox"/>	294.783	5.0 mm	125 mm
<input type="checkbox"/>	294.784	5.0 mm	150 mm
<input type="checkbox"/>	294.785	5.0 mm	175 mm
<input type="checkbox"/>	294.786	5.0 mm	200 mm
<input type="checkbox"/>	294.788	5.0 mm	250 mm

Schanz Screws, blunted trocar point



		DIAMETER	LENGTH
<input type="checkbox"/>	294.52	5.0 mm	100 mm
<input type="checkbox"/>	294.53	5.0 mm	125 mm
<input type="checkbox"/>	294.54	5.0 mm	150 mm
<input type="checkbox"/>	294.55	5.0 mm	170 mm
<input type="checkbox"/>	294.56	5.0 mm	200 mm
<input type="checkbox"/>	294.57	5.0 mm	250 mm
<input type="checkbox"/>	294.71	4.5 mm	80 mm
<input type="checkbox"/>	294.72	4.5 mm	100 mm
<input type="checkbox"/>	294.73	4.5 mm	125 mm
<input type="checkbox"/>	294.74	4.5 mm	150 mm
<input type="checkbox"/>	294.75	4.5 mm	175 mm
<input type="checkbox"/>	294.76	4.5 mm	200 mm

Titanium Self-Drilling Schanz Screws



		DIAMETER	LENGTH
<input type="checkbox"/>	494.769	4.0 mm/2.5 mm	80 mm
<input type="checkbox"/>	494.771	4.0 mm/3.0 mm	80 mm
<input type="checkbox"/>	494.772	4.0 mm/3.0 mm	100 mm
<input type="checkbox"/>	494.774	4.0 mm	60 mm
<input type="checkbox"/>	494.775	4.0 mm	80 mm
<input type="checkbox"/>	494.776	4.0 mm	100 mm
<input type="checkbox"/>	494.777	4.0 mm	125 mm
<input type="checkbox"/>	494.778	4.0 mm	150 mm
<input type="checkbox"/>	494.779	4.0 mm	175 mm
<input type="checkbox"/>	494.782	5.0 mm	100 mm
<input type="checkbox"/>	494.783	5.0 mm	125 mm
<input type="checkbox"/>	494.784	5.0 mm	150 mm
<input type="checkbox"/>	494.785	5.0 mm	175 mm
<input type="checkbox"/>	494.786	5.0 mm	200 mm
<input type="checkbox"/>	494.788	5.0 mm	250 mm

Schanz Screws, trocar point



		DIAMETER	LENGTH
<input type="checkbox"/>	294.767	4.0 mm/2.5 mm	65 mm
<input type="checkbox"/>	294.768	4.0 mm/2.5 mm	80 mm
<input type="checkbox"/>	294.30	4.0 mm/3.0 mm	80 mm

Schanz Screws, spade point




		DIAMETER	LENGTH
<input type="checkbox"/>	294.43	4.0 mm	60 mm
<input type="checkbox"/>	294.44	4.0 mm	80 mm
<input type="checkbox"/>	294.45	4.0 mm	100 mm
<input type="checkbox"/>	294.48	4.0 mm	150 mm

Inventory Control Form


Implants (cont'd)

Steinmann Pins



		DIAMETER	LENGTH
	293.35	3.5 mm	120 mm
	293.36	3.5 mm	150 mm
	293.40	4.0 mm	150 mm
	293.41	4.0 mm	180 mm
	293.42	4.0 mm	200 mm
	293.44	4.5 mm	120 mm
	293.45	4.5 mm	150 mm
	293.46	4.5 mm	180 mm
	293.47	4.5 mm	200 mm
	293.48	4.5 mm	250 mm
	293.48L	4.5 mm	275 mm
	293.48X	4.5 mm	300 mm
	293.49	4.5 mm	225 mm
	293.50	5.0 mm	150 mm
	293.51	5.0 mm	180 mm
	293.52	5.0 mm	200 mm
	293.53	5.0 mm	250 mm
	293.54	5.0 mm	300 mm
	293.58	5.0 mm	225 mm
	293.59	5.0 mm	275 mm


Steinmann Pins with Central Thread



		DIAMETER	LENGTH
	293.60	3.0 mm	150 mm
	293.61	3.5 mm	150 mm
	293.62	4.0 mm	150 mm
	293.63	4.5 mm	150 mm
	293.65	3.0 mm	180 mm
	293.66	3.5 mm	180 mm
	293.67	4.0 mm	180 mm
	293.68	4.5 mm	180 mm
	293.69	5.0 mm	175 mm
	293.70	3.0 mm	200 mm
	293.71	3.5 mm	200 mm
	293.72	4.0 mm	200 mm
	293.73	4.5 mm	200 mm
	293.74	5.0 mm	200 mm
	293.78	4.5 mm	225 mm
	293.83	4.5 mm	250 mm
	293.88	4.5 mm	275 mm
	293.93	4.5 mm	300 mm


Fixation Material

MR Conditional Clamps

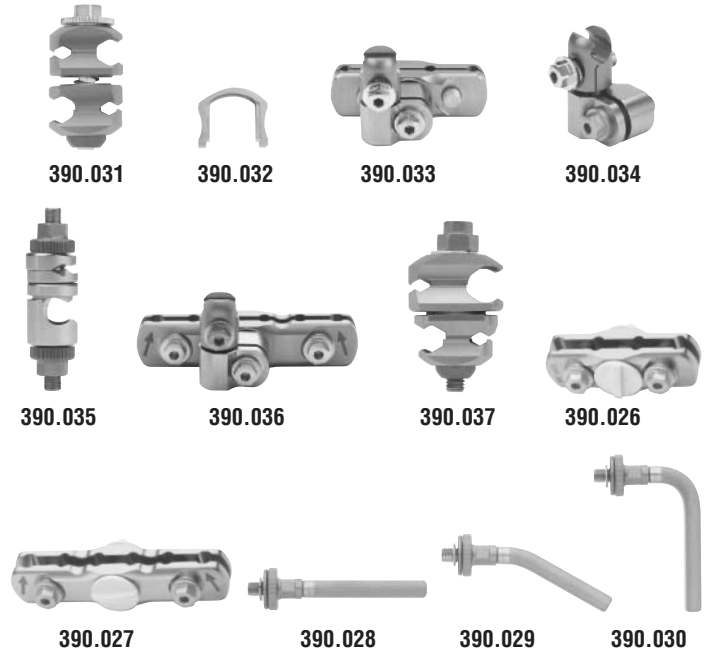

	390.031	Medium Combination Clamp
	390.032	Dynamization Clip for Medium Combination Clamp
	390.033	Medium Multi-Pin Clamp, 4 position
	390.034	Rod Attachment for Medium Multi-Pin Clamp
	390.035	Medium Open Adjustable Clamp
	390.036	Medium Multi-Pin Clamp, 6 position
	390.037	8.0 mm/11.0 mm Combination Clamp
	390.026	Medium Pin Clamp, 4 position
	390.027	Medium Pin Clamp, 6 position
	390.028	Straight Outrigger Post, 8 mm
	390.029	30° Outrigger Post, 8 mm
	390.030	90° Outrigger Post, 8 mm

8.0 mm Carbon Fiber Rods



	LENGTH		LENGTH	
	395.779	160 mm	395.788	280 mm
	395.780	120 mm	395.792	320 mm
	395.782	200 mm	395.796	360 mm
	395.784	220 mm	395.797	400 mm
	395.786	240 mm	395.798	460 mm

Fixation Material (cont'd)

8.0 mm Curved Carbon Fiber Rods



		LENGTH	ANGLE	SPAN
<input type="checkbox"/>	395.690	214 mm	45°	207 mm
<input type="checkbox"/>	395.691	425 mm	90°	382 mm
<input type="checkbox"/>	395.692	638 mm	135°	499 mm
<input type="checkbox"/>	395.693	850 mm	180°	540 mm

394.055 Elbow Hinge Fixator



Protective Caps

<input type="checkbox"/>	394.991	For 4.0 mm Fixation Pins
<input type="checkbox"/>	394.992	For 4.5 mm Fixation Pins
<input type="checkbox"/>	394.993	For 5.0 mm Fixation Pins
<input type="checkbox"/>	395.781	For 8.0 mm Carbon Fiber Rods



Instruments

Drill Bits



<input type="checkbox"/>	310.19	2.0 mm Drill Bit, quick coupling, 100 mm
<input type="checkbox"/>	310.37	3.5 mm Drill Bit, quick coupling, 195 mm